



Super Thin LED Wall Mounted Film Viewer



Single Screen

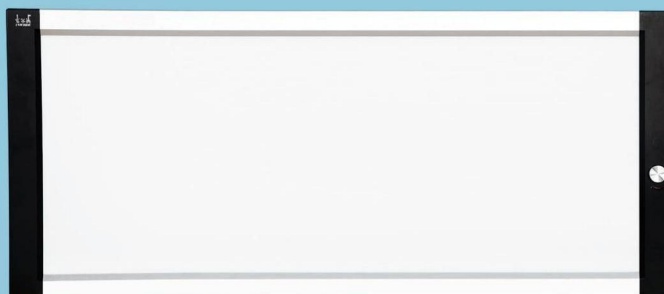


Three Screen

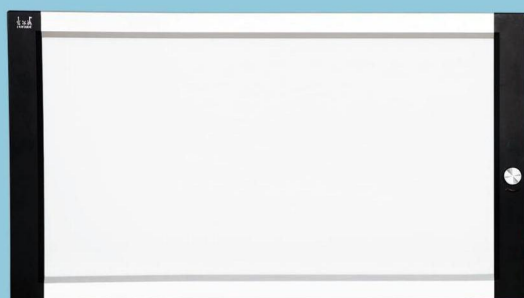

Double Screen



Four Screen



Model	single screen	double screen	three screen	four screen
Size (L*W*T mm)	475*510*25	860*510*25	1190*510*25	1550*510*25
Reading area (L*W mm)	360*425	720*425	1080*425	1440*425
Max power(W)	30W	50W	80W	100W
Light source type / color temperature / service life	Super bright SMD LED; 8000k color temperature; light source with 100,000 hours of service life			
Power/voltage/frequency	Global voltage adaptive built-in power supply; AV90V-240V 50/60HZ			
The adjustment range of screen brightness	Adopting 0-10V dimming technology and NiteCore Extreme, brightness range 0-4500cd/m'			
Sensing function	Automatic sensing, insert in and light up			
The uniformity of screen brightness	≥ 90%			
Clamping device	Stainless steel rolling needle oblique compression clamping device			
installation	Wall-mounted			
Applicable film	Ordinary analog X-ray film, high-density digital X-ray film, molybdenum target breast medical film			
Applicable environmental conditions	It is recommended that the ambient illuminance in the film reading room should not exceed 100Lx			